







Plan
Scale: 6" = 1'-0"

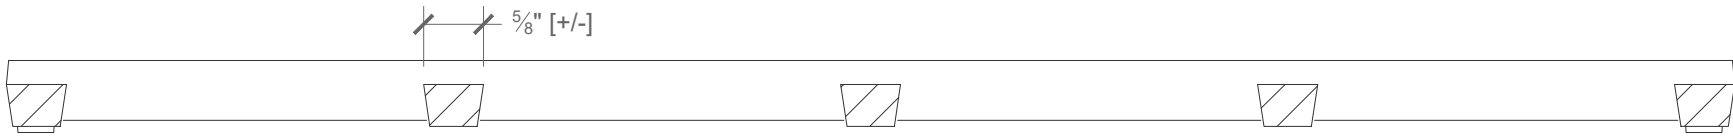

Longitudinal Section
Scale: 6" = 1'-0"

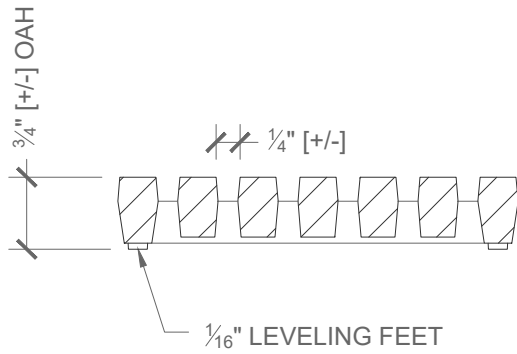

Cross Section
Scale: 6" = 1'-0"

URBAN ACCESSORIES	
 	
 	
465 E 15th Street, Tacoma, WA 98421 1.877.487.0488 1.253.572.1112	
This print is the property of Urban Accessories, Inc. and is loaned to the recipient subject to be returned on demand. All contents herein are confidential and must not be copied or submitted to outside parties for examination without the express written consent of Urban Accessories, Inc.	
If you received these documents in mistake please contact sales@urbanaccessories.com.	
Project Name	Blank
Specified By	Blank
Sales Contact	sales@urbanaccessories.com
Project Location	Tacoma, WA
Page #	1 of 1
Additional Notes	
JAMISON GRATE	
4.1875" x 18" - Parallel	
STANDARD SPECIFICATIONS	
- Material will be high quality 100% gray iron, ASTM A48 class 35b or better, hardness 170-223 brinell (unless specified otherwise; see below).	
- Finish will be natural patina of raw material (unless specified otherwise; see below).	
- Frame is load rated for pedestrian traffic only (unless specified otherwise; see below).	
- Dimensions are nominal.	
OPTIONS	
Materials: <input type="checkbox"/> Gray Iron, ASTM A48 <input type="checkbox"/> Ductile iron, (All load ratings higher than pedestrian) ASTM A536 class 65-45-12 <input type="checkbox"/> Aluminium, ASTM B26 <input type="checkbox"/> Nickel Bronze, ASTM B584 <input type="checkbox"/> Bronze, ASTM B584	
Finishes: <input type="checkbox"/> Raw (standard) <input type="checkbox"/> Rust Conditioner <input type="checkbox"/> Polyester powdercoat (Specify color) <input type="checkbox"/> Liquid coat (Specify color) <input type="checkbox"/> Brush <input type="checkbox"/> Polish <input type="checkbox"/> Galvanized <input type="checkbox"/> Other: _____ (With approval from UA)	
ADDITIONAL NOTES	
-Grate is 3/4" thick at edge. -No opening greater than 1/4", in conformance with ADA Accessibility Guidelines. - By default the last grate in a trench run will be sheared to meet run length specified at time of order. Alternatively, the trench run length may be adjusted to nearest whole grate (tolerances in grate size will compound across the overall run). Please provide instructions in the comments section below.	
DRAWING INFO	
Drawn By	PH
Date Drawn	2.11.2026